STELLONLighting for construction work Type A 170W



We are committeed to provide high performance, high quality, high durability product as a reasonable price that lighting experts wanted. We aim for world best in outdoorlighting and specific object lighting



**This product is a picture to help you understand the exact form of the product please check the dimensions of the product.

● TYPE A: Opacity / Wheel (○)

• TYPE B : Transparency / Wheel (X)



Weight

light battery

17.5Kg 5.2Kg

Lighting for construction work Type A 170W







■ Product Features

01. Indoor work lighting

Reduced glare (Opaque cover) -5m Brightness around 100lux -Upper ceiling 281lux

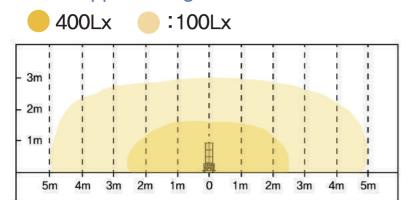

02.Connectable

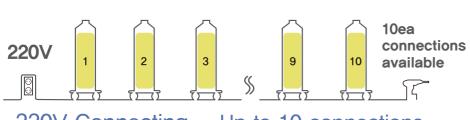

-220V Connecting -Up to 10 connections products to outlet

03. Portability

- -With lithium battery
- -Cable length 10m when using outlet
- -Handle & wheel








04. Able to seperate

-Removable top and bottom of product



Specifications

-Specifications

LED	Illuminance (1M)	Beam angle	CRI	ССТ	Operating temperature
Samsung	1,160(lux)	360°	OVER 80	5,300K	-20~45℃


Power Consumption		Input voltage		Wire specification	Cable length	Material
Battery	AC	AC 160~305V		2.5SQ X 3C	10m	Stainless(STS304)
170W	200W	(50Hz/60Hz)		2,55Q \ 5C	10111	Aluminum(5052)

-Battery Specifications

Enclosure Material	Kinds	Volume	Operating time	Charging time
Aluminum	Lithium	860wh	5~10hours	Around 6hours (full charge)

*Operating time may vary depending on usage environment

■ Product dimensions (1030mmX450mmX310mm)

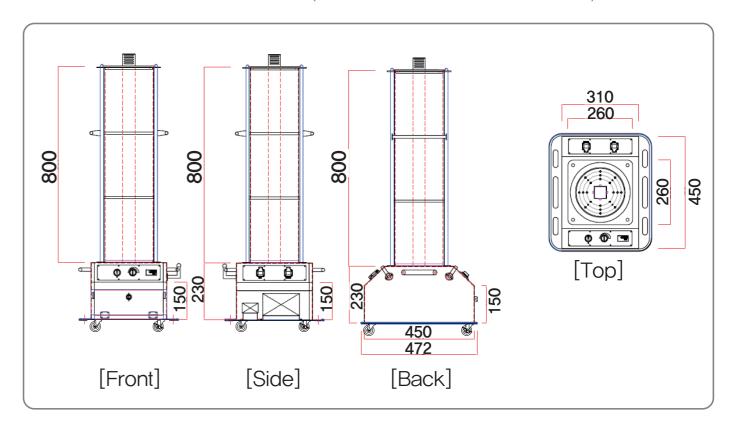



Lighting for construction work Type A 170W





■ Precautions

- ① 제품은 정격램프 전용으로 제작되었으니 **정격 전압**을 사용하십시오. (AC:220V, 50Hz/60Hz) The product, please use the specified voltage after turning to the rated lamp dedicating.
- ② **전용 배터리**를 사용하십시오. 타 배터리 사용시 품질을 보증 할 수 없습니다. Please use a dedicated battery. Other batteries can not guarantee quality.
- ③ 콘센트의 **허용 전류(10A)**를 사용하시기 바랍니다. Dimmer와 Battery gauge는 참조용 입니다. Please use the allowable electric current. *참조용으로 오차가 있을수 있습니다
- ④ 배터리 교체 및 충전기 사용시 **극성에 유의**하시기 바랍니다. (잘못 연결시 미점등, 조명이 파손 될 수 있습니다.) Please becareful of the polarity when replacing the battery and using the charger.
- 5 배터리 교체시 **OFF모드**에서 교체 바랍니다. Replace the battery in OFF mode.
- ⑥ 배터리 충전시 제품에서 **분리후 충전**하시기 바랍니다 When charging the battery, please remove it from the product and charge it.
- ① 임의 분해시 품질 보증이 되지 않습니다. 구입처로 연락 부탁드립니다. C/S is not guaranteed when disassembled, please ask to store which your bought

Application



■ Product comparison

	TYPE A	TYPE B	
Wheel	Ο	X	
Central light cover	Opacity	Transparency	



Vech



Professional manufacturer of LED special lighting and luminaire

Date of establishment 2010년 12월 29일

CEO KIM SEOUNG HUN

Address

1gongdanro 86-21 Gumi-Si
Gyungsangbuk-Do KOREA

Homepage www.stellon.kr

TEL 054-473-9420